


1. เปิดหน้า web browser พิมพ์ 192.168.1.1 ที่ address bar

ในช่อง username & password พิมพ์ admin

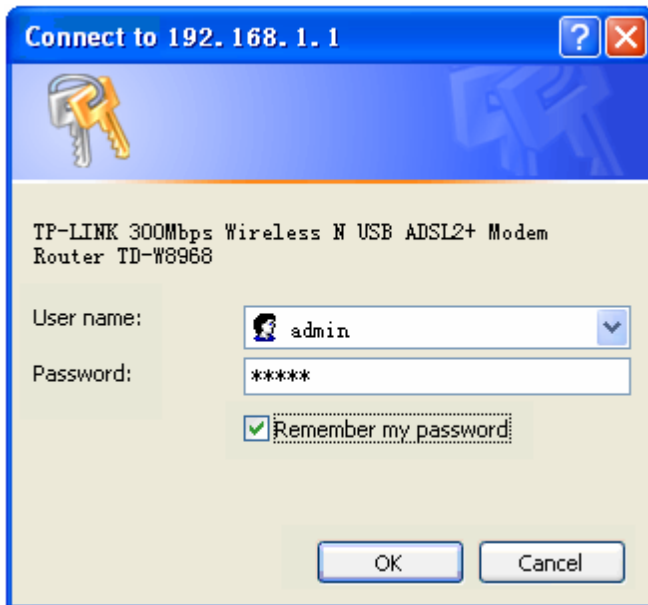

2. เลือก quick set up เลือกหัวข้อ adsl modem router mode กด next

**Quick Setup - Operation Mode**

Choose Operation Mode:

- ADSL Modem Router Mode**
- 3G Router Mode
- Wireless Router Mode

3. ตั้ง vpi = 1

Vci = 32

กด next

**Quick Setup - DSL**

Please enter the VPI/VCI provided by your ISP(Internet Service Provider).

**VPI:**  (0-255)

**VCI:**  (1-65535)

4. เลือก pppoe กด next

## Quick Setup - ADSL Connection Type

Please select the connection type provided by your ISP.

- PPPoE** (Require a username and password, PPP over Ethernet)
- PPPoA** (Require a username and password, PPP over ATM)
- Dynamic IP** (Get dynamic IP from ISP, also called IPoE Dynamic IP)
- Static IP** (Manually set the static IP address provided by your ISP, also called IPoE Static IP)
- IPoA** (Manually set the static IP address provided by your ISP, also called IP Over ATM)
- Bridge** (Dial up from the single computer or router)

Back

Next

5. ใส่ u/p ที่หน้าผ.อย่าลืมช่อง confirm password ใส่ password อีกครั้งหนึ่งให้เหมือนเดิมแล้วกด next

## Quick Setup - PPPoE

Please enter ADSL Username and Password. If you forget them, please consult your ISP.

Username:

Password:

Confirm password:

Back

Next

6. ช่องนี้ไม่ต้องเลือกกด next ได้เลย

## Quick Setup - 3G

Enable 3G as a backup solution for Internet access

3G can be set as a backup Internet access method. If you don't want to configure 3G settings now, just click the Next button and go ahead. Otherwise, you can enable 3G backup for configuration.

Back

Next

7. Wireless : enable

Wireless network name : ชื่อไวร์เลสให้ลูกค้าตั้ง

Region : united states

Channel : ตัวเลขอะไรก็ได้

Security : wpa (ตัวแรก)

: password ให้ลูกค้าตั้ง 8-64 ตัว (ตัวเลข 0-9, ตัวอักษร a-z)

กด next

## Quick Setup - Wireless

**Wireless:**  Enable  Disable

**Wireless Network Name:**  (Also called SSID)

**Region:**

**Channel:**

**Mode:**

**Security:**

**WPA-PSK/WPA2-PSK (Recommended)**

**Password**

(Enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

**Disable Wireless Security**

**Back**

**Next**

### 8. กด save

## Quick Setup - Confirm

The Quick Setup is completed. Please confirm all the parameters below. Click BACK button to modify or click SAVE button to save your configuration.

Parameters Summary:

**DSL PVC:** 8/35  
**Connection Type:** PPPoE  
**Username:** 123  
**Password:** \*\*\*

**3G Backup:** Disabled  
**Location:** USA  
**ISP:** AT&T  
**Authentication Type:** AUTO\_AUTH  
**Dial Number:** \*99#  
**APN:** WAP.CINGULAR  
**PPP3G Username:** WAP@CINGULAR.COM  
**PPP3G passwd:** CINGULAR1

**Wireless:** Enabled  
**Wireless Network Name(SSID):** TP-LINK\_556677  
**Region:** United States  
**Channel:** Auto  
**Mode:** 11bgn mixed  
**Security:** Disabled

**Back**

**Save**

### 9. กด finish

## Quick Setup - Complete

Setup Status:

**Operation Mode Configuring:** Success  
**WAN Connection Configuring:** Success  
**3G Connection Configuring:** Success  
**Gateway and DNS Configuring:** Success  
**Wi-Fi Configuring:** Success

Quick Setup has completed. Please click FINISH button to exit.

Note: If the Modern Router still can not connect to the Internet, please click "Network > WAN Settings" menu on the left to confirm the WAN connection type and mode on the WAN Settings page.

**Finish**