


วิธีการตั้งรหัส WIFI สำหรับ D-Link DIR1251 (คอมพิวเตอร์หรือ Notebook)


รูปแบบการเชื่อมต่อ

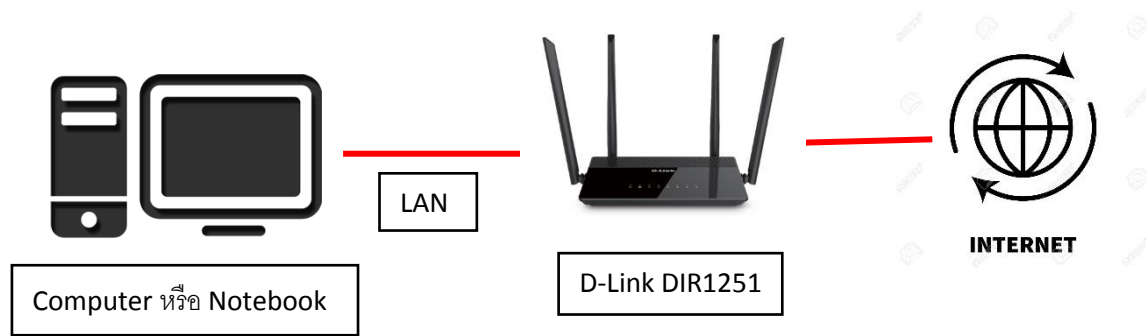

1. เชื่อมต่อสายแลนที่ช่อง LAN ของ D-Link DIR1251 กับ LAN ของคอมพิวเตอร์ แล้วเปิด Browser ไปที่ <http://192.168.0.1> เพื่อเข้าไปตั้งค่า

The screenshot shows a web browser window with the address bar containing "192.168.0.1/info/Login.html". The page header includes the D-Link logo, model name "DIR-1251", hardware version "A1", firmware version "1.00ATObeta", and a language dropdown menu set to "English". The main content area features a login form with two input fields: "Admin Password:" and a CAPTCHA field. The CAPTCHA image displays the characters "B F 2 L G" with a refresh icon. A "Log In" button is positioned below the input fields. At the bottom of the page, there is a copyright notice: "COPYRIGHT © 2017 D-Link" and a link to the "License Agreement".

2.ทำการ Login โดย Password จะเป็นรหัสที่ตั้งค่าในการใช้งานครั้งแรก และทำการใส่รหัส CAPTCHA ให้ถูกต้อง

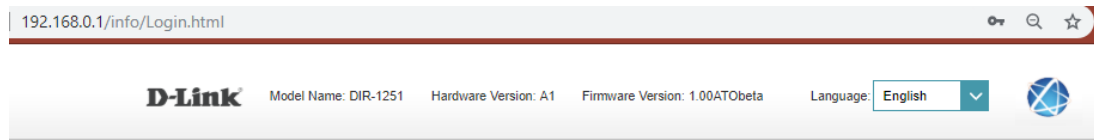The image shows the main login form area. It is divided into two columns. The left column is titled "Admin Password:" and contains a text input field with a masked password "*****". The right column is titled "Type the characters you see in the picture below." and contains a CAPTCHA image showing the characters "BF2LG" in a stylized font. Below the CAPTCHA image is a text input field containing the characters "BF2LG". At the bottom center of the form is a blue "Log In" button.

3.การตั้งค่าชื่อและรหัส WIFI ให้ไปที่ Settings >>> Wireless

D-Link
DIR-1251 HW:A1 FW:1.00ATObeta

Home | Settings | Features | Management

Internet Disconnected

Click on any item in the diagram for more information.

Internet DIR-1251 Connected Clients: 1

Internet

Cable Status:	Disconnected	MAC Address:	00:AD:24:5B:91:D6
Connection Type:	Dynamic IP (PPPoE)	IP Address:	Not Available
Network Status:	Disconnected	Subnet Mask:	Not Available
Connection Uptime:	0 Day 0 Hour 0 Min 0 Sec	Default Gateway:	Not Available
		Primary DNS Server:	Not Available
		Secondary DNS Server:	Not Available

[IPv4](#) / [IPv6](#)

[Go to settings](#) →

4.เมื่อมาถึงเมนูนี้จะสามารถตั้งชื่อและรหัส WIFI ได้ทั้งย่านความถี่ 2.4 GHz และ 5 GHz โดยช่อง Wi-Fi Name (SSID) จะเป็นช่องสำหรับการตั้งชื่อ และ Password จะเป็นช่องสำหรับตั้งรหัสผ่าน WIFI หลังจากตั้งค่าเสร็จ ให้กด Save ทำการรออุปกรณ์ Reboot 80 วินาที

The screenshot shows the D-Link wireless settings interface. At the top, there is a navigation bar with 'Home', 'Settings', 'Features', and 'Management'. Below this is the 'Wireless' section header with a Wi-Fi icon and a brief instruction: 'Use this section to configure the wireless settings for your D-Link Router. Please make sure that any changes made in this section will need to be updated on your wireless device.' A 'Save' button is highlighted with a red box. Below the 'Save' button, there are two sections for wireless bands: '2.4GHz' and '5GHz'. Each section has a 'Status' dropdown set to 'Enabled'. The '2.4GHz' section has a 'Wi-Fi Name (SSID)' field containing 'DLink1251_2.4GHz' and a 'Password' field containing '12345678'. The '5GHz' section has a 'Wi-Fi Name (SSID)' field containing 'DLink1251_5GHz' and a 'Password' field containing '12345678'. Both sections have an 'Advanced Settings...' link to the right.

This screenshot shows the same D-Link wireless settings page as above, but with a 'Rebooting' dialog box overlaid in the center. The dialog box is white with a grey border and contains a loading spinner icon at the top, followed by the text '78 Sec' and 'Rebooting' in red. The background settings page is dimmed, showing the 'Save' button and the configuration fields for both 2.4GHz and 5GHz bands.