

SMC 7401 BRA



การตั้งค่า Modem


1. เปิด Internet Explorer แล้วพิมพ์ 192.168.2.1 ที่ address bar จะปรากฏหน้าจอดังรูป ให้พิมพ์ Username: admin, Password barricade




2. เมื่อเข้าได้แล้วจะพบหน้าแรก ดังรูปเลือกที่ Setup Wizard




3. เลือก Time Zone เป็น GMT+7 BANGKOK แล้วกด Next

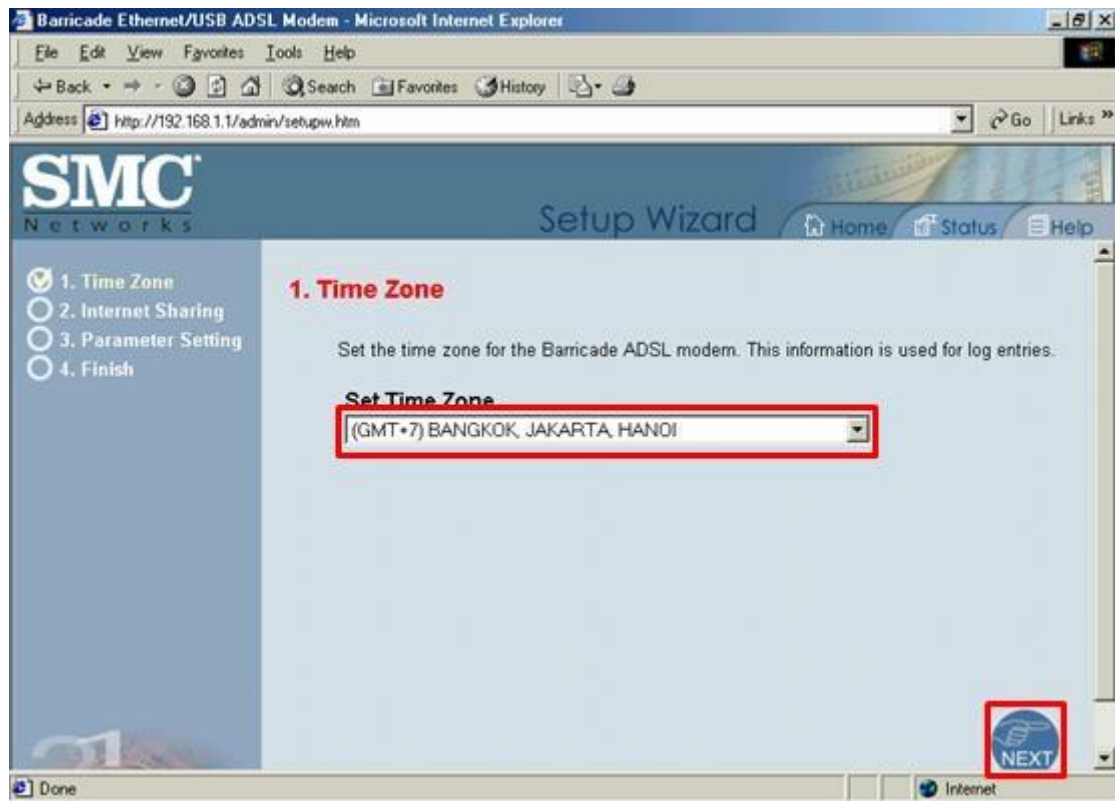

4. เลือก PPPoE (Routing Mode, for multiple PCs) แล้วกด Next

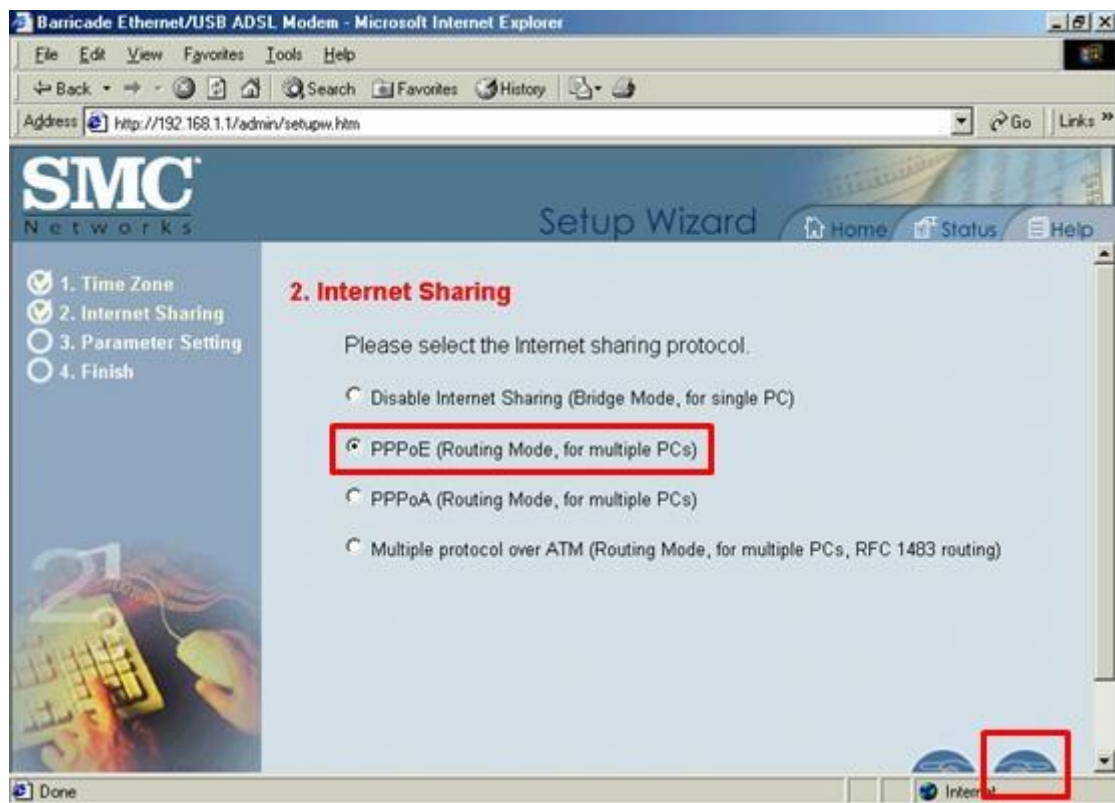


5. ใส่ Username, Password, VPI/VCI ตามที่ได้รับมา

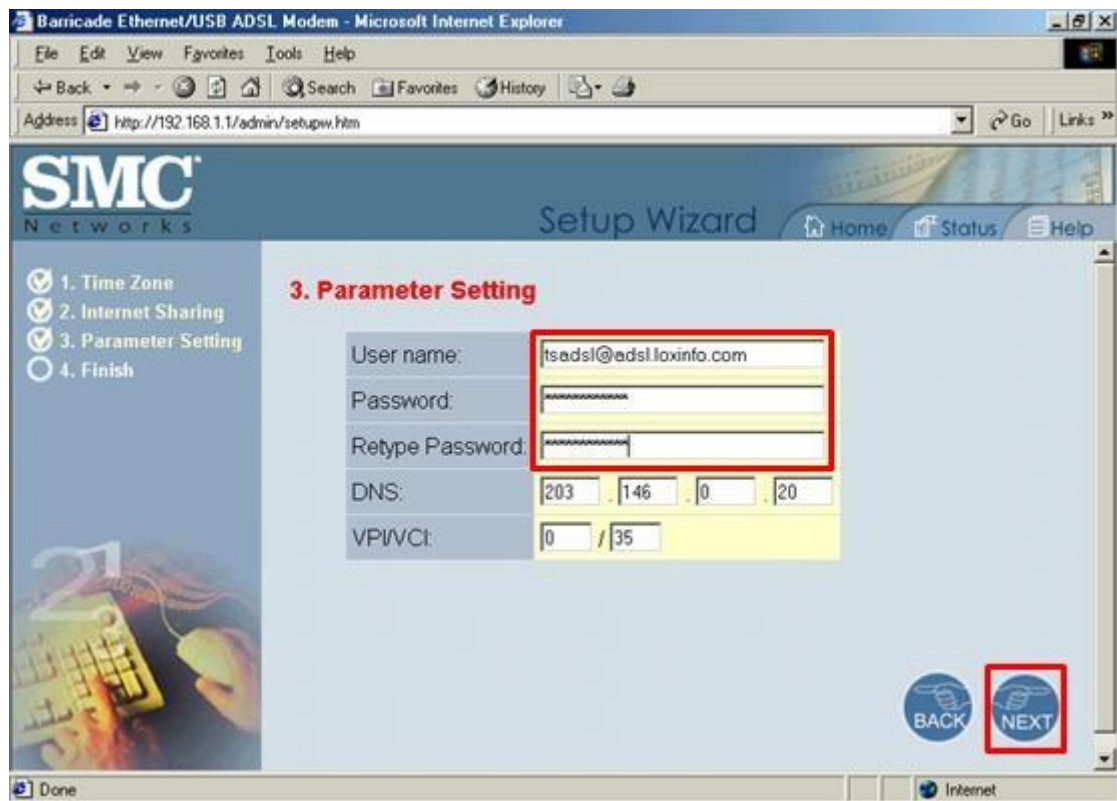

6. จมหน้า Config แล้วกด Next



7. Click ที่ Reboot รอ Router ทำการ Reboot จนไฟ sync ติดอีกครั้ง

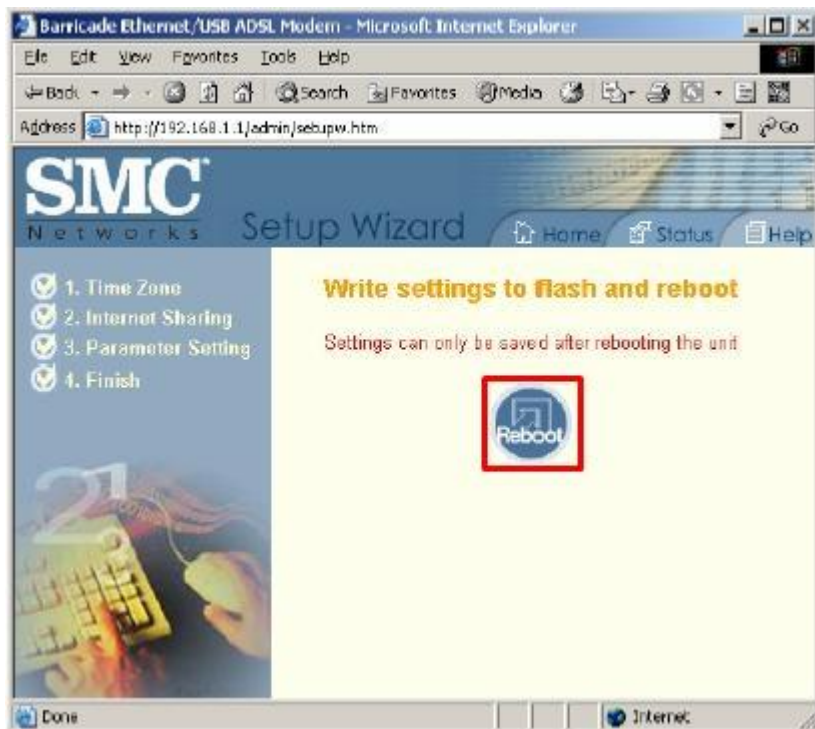

การตรวจสอบค่า IP Address

1. กดที่ ปุ่ม Status



2. จากนั้นจะปรากฏหน้าจอ STATUS ขึ้นมา ถ้าทุกอย่างปกติ ในส่วนของ WAN จะแสดง IP Address ของ ISP ออกมาให้พบ

Barricade Ethernet/USB ADSL Modem - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites History

Address http://192.168.1.1/admin/setup.htm Go Links

SMC
Networks

Status Help

- ADSL
- LAN
- WAN Status
- PPP Status
- TCP Status

STATUS

The Status page allows you to monitor the Barricade status

Firmware Version: **SMC7401BRA1.10**
Showtime Firmware Version: **2.28d**
Customer Software Version: **SMC7401BRA**

WAN

IP Address	Subnet Mask	MAC Address
210.1.57.154	255.255.255.0	00:04:E2:78:EA:E7

Done Internet